

ACCESS- SIBILITY FOR YOUR HOME


Aritco HomeLift Access Datasheet 2025

Aritco HomeLift Access is designed to provide smooth access throughout your home — for you, your family, and your guests. It's practical, customizable, and fits various needs with options like glass walls, color selections, and material finishes.

Key advantages:

- Designed specifically for home environments
- Minimum interventions in the house
- Option for a “half-height door” on the top floor
- 95% recyclable materials
- Patented screw/nut technology (no oil that can leak)
- Low maintenance and running costs
- Built-in SmartSafety system
- Accessible online via Aritco SmartLift.

For more information please visit aritco.com

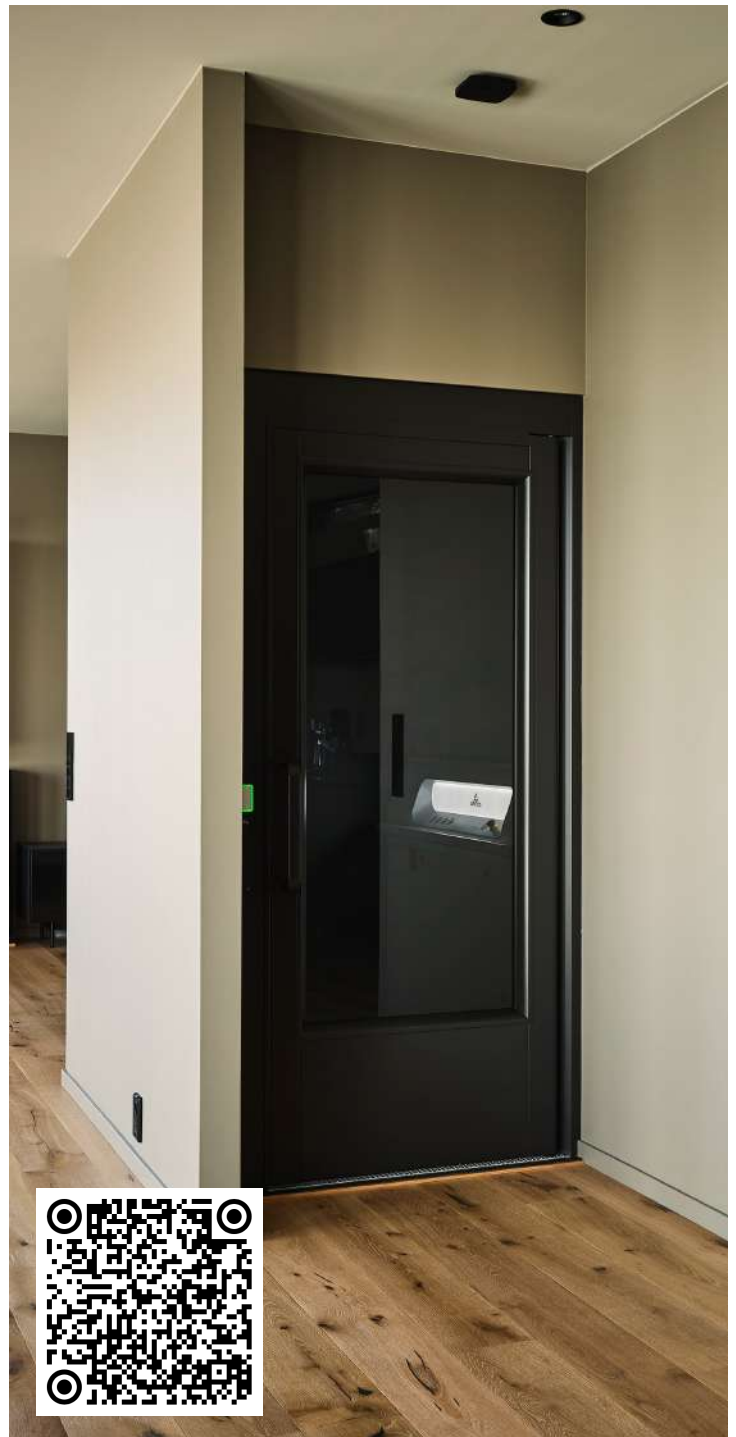

 **ELEVÁRE**
CERTIFIED PARTNER OF ARITCO


ARITCOTM

Elevare Indonesia

Clon Park 32, Jakarta
Garden City Boulevard,
Cakung, Jakarta Timur

P : +62 811-800-8012

E : admin@elevareindonesia.com


W : elevareindonesia.com



Aritco HomeLift Access

Aritco HomeLift Access offers full customization with 200+ colors, 2 glass types, and 8 floorings. Designed for practicality and accessibility, it fits various needs — including strollers and wheelchairs. SmartLift-enabled with live updates, remote support, and built-in SmartSafety features.

Sizes

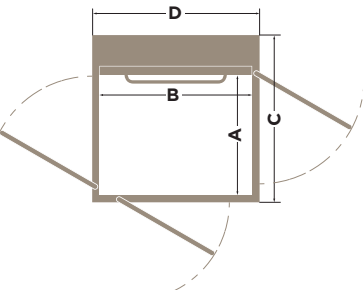

SIZE	CARRIER SIZE (AxB)	FINISH SIZE (CxD)	RATED LOAD
A1	900 x 1 040 mm	1 300 x 1 160 mm	250 kg / 2 pers
A2	900 x 1 280 mm	1 300 x 1 400 mm	410 kg / 5 pers
A3	900 x 1 480 mm	1 300 x 1 600 mm	410 kg / 5 pers
A4	1 000 x 1 280 mm	1 400 x 1 400 mm	410 kg / 5 pers
A5	1 000 x 1 480 mm	1 400 x 1 600 mm	410 kg / 5 pers
A6	1 100 x 1 480 mm	1 500 x 1 600 mm	410 kg / 5 pers
A7	1 100 x 1 580 mm	1 500 x 1 700 mm	500 kg / 6 pers
A8	1 000 x 1 980 mm	1 400 x 2 100 mm	500 kg / 6 pers

DesignWall™



Lift colour

Any RAL K7 classic chart colour (Except for pearl and fluorescent)



Glass panel



Clear Glass
(Std.)



Tinted
(Opt.)

Floor



Tehnical compliance

European Machine Directive 2 006/42/EC | European Standard EN 81-41

Drive system

Patented screw-and-nut system

Rated speed

Max 0.25 m/s

Emergency lowering

Battery-powered

Travel height

500 - 13 000 mm

Number of Floors

2 - 6 floors

Installation

Recessed installation 50 mm below floor level / 0 mm with a ramp

Operation

One-touch operation (press one time)

Power supply

230 V 1-phase | 400 V 3-phase

Warranty

5-year product warranty and a 10-year drive technology warranty

