

SMART ACCESS IN PUBLIC & COM- MERCIAL


Aritco PublicLift Access Datasheet 2025

Aritco PublicLift Access is designed to make public and commercial buildings accessible for everyone. The lift expresses Scandinavian design and features a backlit panel and lit handlebar.

Key advantages:

- Designed specifically for public environments
- 95% recyclable materials
- Patented screw/nut technology (no oil that can leak)
- Low maintenance and running costs
- Built-in SmartSafety system

For more information please visit aritco.com

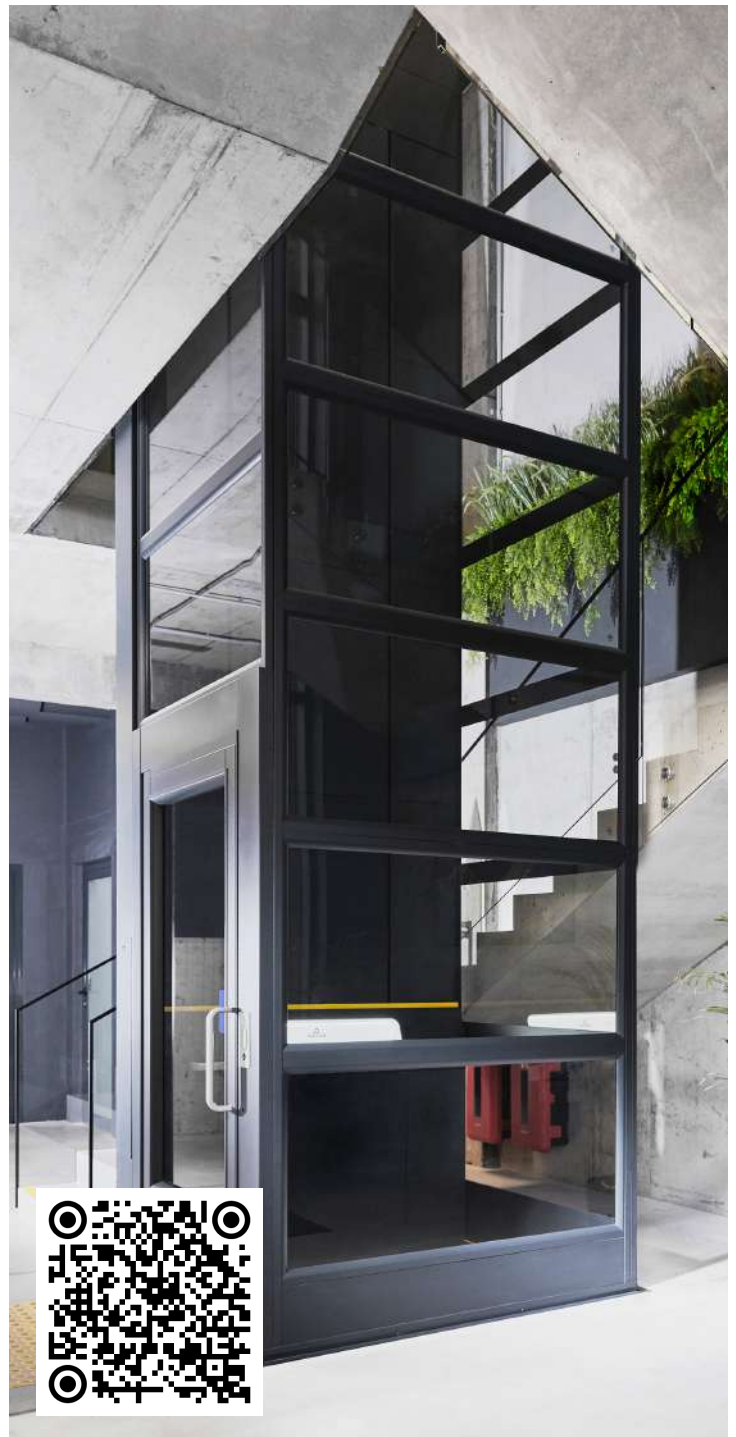

 **ELEVÁRE**
CERTIFIED PARTNER OF ARITCO


ARITCO™

Elevare Indonesia
Clon Park 32, Jakarta
Garden City Boulevard,
Cakung, Jakarta Timur


P : +62 811-800-8012
E : admin@elevareindonesia.com
W : elevareindonesia.com



Aritco PublicLift Access

Aritco PublicLift Access offers full customization with 200+ colors, 2 glass types, and 8 floorings. Built for reliability and durability in high-traffic environments, it's SmartLift-enabled for remote monitoring and equipped with SmartSafety features to meet the demands of public spaces.

Sizes

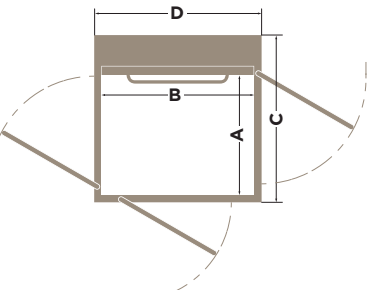

SIZE	CARRIER SIZE (AxB)	FINISH SIZE (CxD)	RATED LOAD
A1	900 x 1 040 mm	1 300 x 1 160 mm	250 kg / 2 pers
A2	900 x 1 280 mm	1 300 x 1 400 mm	410 kg / 5 pers
A3	900 x 1 480 mm	1 300 x 1 600 mm	410 kg / 5 pers
A4	1 000 x 1 280 mm	1 400 x 1 400 mm	410 kg / 5 pers
A5	1 000 x 1 480 mm	1 400 x 1 600 mm	410 kg / 5 pers
A6	1 100 x 1 480 mm	1 500 x 1 600 mm	410 kg / 5 pers
A7	1 100 x 1 580 mm	1 500 x 1 700 mm	500 kg / 6 pers
A8	1 000 x 1 980 mm	1 400 x 2 100 mm	500 kg / 6 pers

Lift colour

Can be painted in any RAL colour from the RAL K7 classic chart (Except for pearl and flourescent colours)



Glass panel



Clear Glass
(Std.)



Tinted
(Opt.)

Floor



Tehnical compliance

European Machine Directive 2 006/42/EC | European Standard EN 81-41

Drive system

Patented screw-and-nut system

Rated speed

Max 0.25 m/s

Emergency lowering

Battery-powered

Travel height

500 - 13 000 mm

Number of Floors

2 - 6 floors

Installation

Recessed installation 50 mm below floor level / 0 mm with a ramp

Operation

One-touch operation (press one time)

Power supply

230 V 1-phase | 400 V 3-phase

Warranty

5-year product warranty and a 10-year drive technology warranty



Alternative model

GOODS is a version designed to carry both people and goods.